


Retail Series

PIXON
TECHNOLOGY

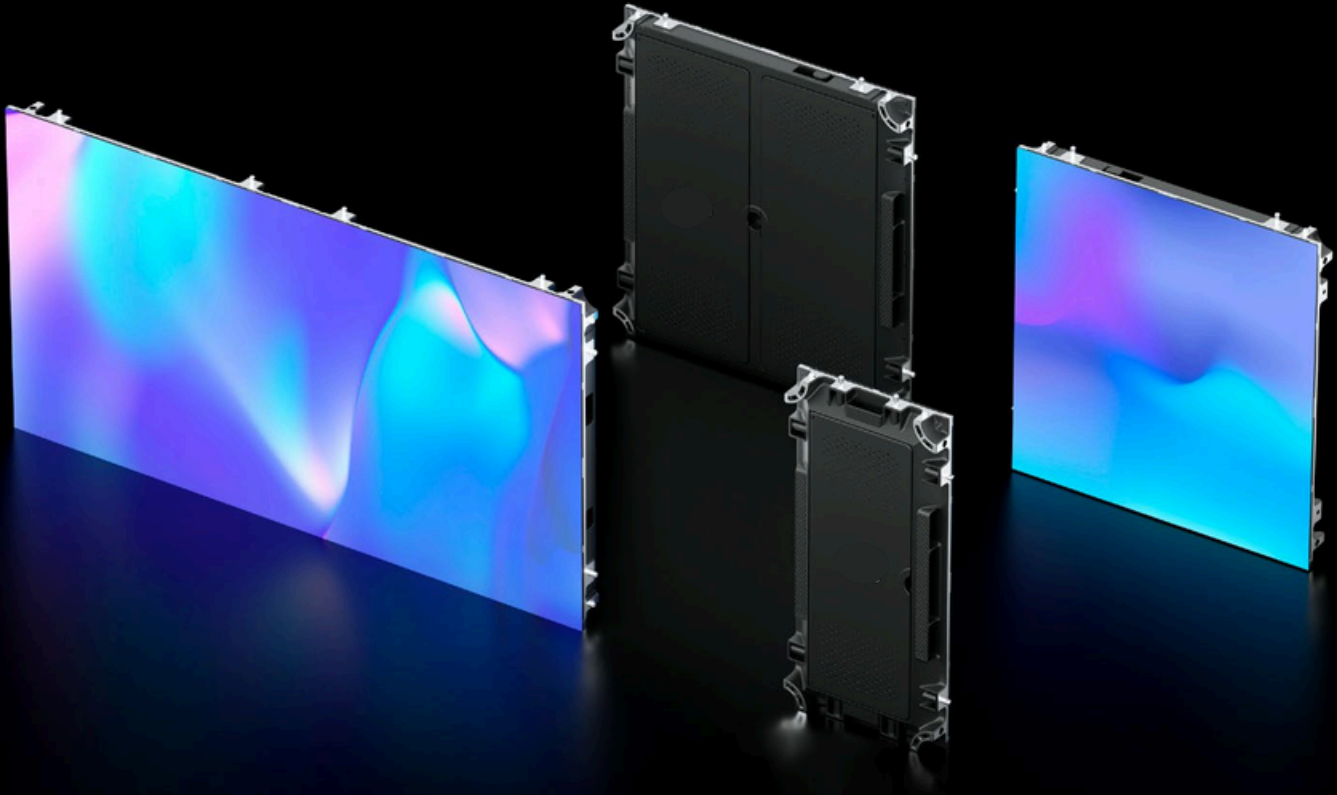

Flexible installation

Hanging, Fixed, Curved,
90°, Cube



Multiple sizes

Three cabinet sizes



Front and rear maintenance

Easier rear access

4000nits

4000nits

Highbrightness up
to 4000nits

Designed for Shop Windows

Retail Series is an LED screen specifically crafted for window display. Installed in windows facing outdoors directly, It boasts a maximum brightness of 4000 nits, ensuring vibrant visibility even in direct sunlight. The images remain bright and clear, capturing attention effortlessly. Additionally, the rear panel features a convenient double-door design, making maintenance a breeze.



Multiple installation methods

Retail Series offers versatile installation options, including floor-standing, ceiling-mounted, and bracket-mounted setups, ensuring easy installation in any setting. Whether on the ground, suspended, or wall-mounted, Retail Series adapts seamlessly to create the ideal visual experience.



Suspension Installation

Retail Series can be suspended from the ceiling, maximising space while keeping the window view unobstructed.



Wall Mounting Installation

Bracket mounting or direct wall mounting are the most stable installation methods. Retail Series supports front and rear maintenance, ensuring easy upkeep even with wall mounting.



Free stand Installation

Floor mounting is more convenient, suitable for a wider range of applications, and allows flexible screen size adjustment.


45° Edge Cutting Design

Supports up to 45° edge cutting and can achieve 90° splicing. Flexibly adapts to environments and offers versatile shapes.



Back Double-Door Design

Enables quicker and more convenient internal maintenance and component replacement, supporting both front and rear maintenance.

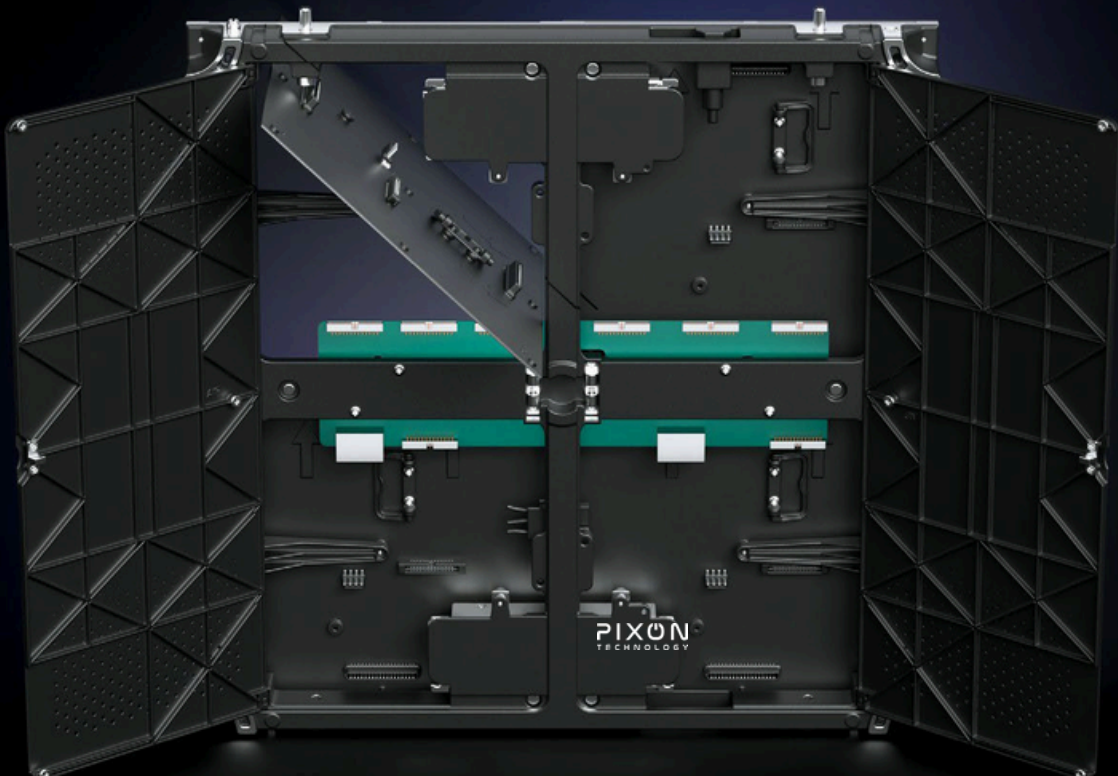

Technical Details

Pixel Pitch	1.5625 mm	1.95 mm	2.604 mm
Maximum Brightness	600 - 3,000 nits		
Color Temperature	7,000±500K		
Unit Cabinet Size	250 x 500 x 42 / 500 x 500 x 42 / 500 x 1000 x 42		
Unit Cabinet Resolution	160 x 320 pixels 320 x 320 pixels 320 x 640 pixels	128 x 256 pixels 256 x 256 pixels 256 x 512 pixels	96 x 192 pixels 192 x 192 pixels 192 x 384 pixels
Power Consumption Max (W/m²)	≤432	≤344	≤296
Power Consumption Typical (W/m²)	≤144	≤115	≤99
Frame Frequency	60Hz		
Refresh Rate	3,840Hz		
Input Voltage	AC: 200~240V / 100~240V, 50/60Hz		
Contrast	3,000:1		
Lifetime	≤50,000 hours		
Maintenance Method	Front and rear maintenance		
Unit Cabinet Weight	Model 250: 4.5 kg/pcs / Model 500: 7.9 kg/pcs / Model 1000: 9.8 kg/pcs		
Operating Temperature /Humidity	-10°C~+45°C / ≤55%RH		
Storage Temperature /Humidity	-10°C~+55°C / ≤55%RH		

Let's talk!

Support: 1300 174 966
 Website: www.pixontech.com.au
 Display Suite: Unit 5, 91-93 Old Pittwater Road, Brookvale, NSW